## Emergency Panic Switch 'NC' Compatible with AIS140 VTS

### Model No. iota706



With Optional Pipe Mounting

Sealed Contact Momentary Push Button With LED Light



30 mm | 32 mm
63 mm | **SOS** | 80 mm
21 mm
Ø7.5 mm
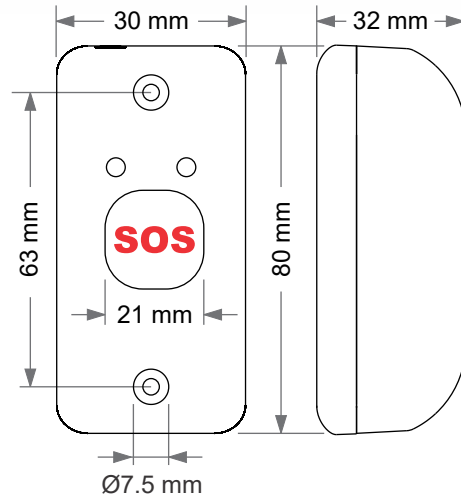
All dimension are in mm tolerance ±0.2mm

### SCHEMATIC & WIRING DIAGRAM

**POWER INDICATOR**

RED WIRE for +12 VOLT DC

BLACK WIRE for GROUND

**'NC' SWITCH**

WHITE WIRE OUTPUT GPS DEVICE

WHITE WIRE INPUT PANIC BUTTON

5mm
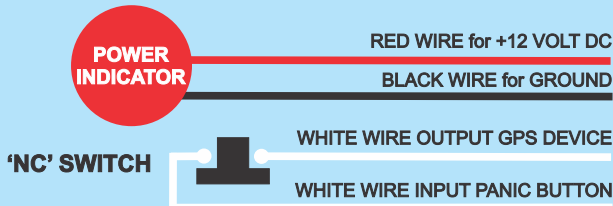
Special Automotive Cable With 4 Numbers 0.5 Sq mm Wire FLRY-B

**Standard Wire Length Is 1 Meter, We Shall Provide Wire / Pigtails As Per OEM's & ODM's Requirement**

### SPECIFICATIONS

| Product | Emergency Panic Switch 'NC' iota706 |
|---|---|
| Color | Black / Grey / Yellow |
| Material | ABS300 Engineering Plastic |
| Store Temperature | -20°C ~ 85°C |
| Operating Temperature | 0°C ~ 65°C |
| Operating Voltage | 10~30 Voltage DC |
| Power Consumption | 1mAmp @ 12Volt DC |
| Operating Type | Momentary 'NC' Switch |
| Power Indicator | Stand By- power Indicator - LED |



**IAS ACCREDITED MSCB118**